ASPHALT WALK

THE SOLUTION FOR OUTDOOR COMMUNICATION

AsphaltWalk is designed to be used for short to mid term applications dependent on where the product is applied. The product can be used on asphalt, cement and untreated stone, pavement and many more surfaces.

The material can easily be removed from such surfaces. AsphaltWalk is designed to be very robust against abrasion and other influences caused by normal use of the product. The special adhesive is designed to work outdoor on rough surfaces.

Uses

- Shop entries & stairways
- Bus, tramway or metro stations, airports
- Sport events: Motor sport events, marathons etc.
- Car, motorbike & general vehicle resellers
- Museums, meetings and other cultural events
- Petrol stations
- Car parks - indoor and outdoor including driveways
- Fast food drive through
- Sports stadiums
- Pedestrian areas

Features & Benefits

- High visual impact
- Easy to apply and remove
- Suitable for rough surfaces
- Slip resistant
- PVC free

info@polichromo.com
www.polichromo.com

ASPHALT ART

THE SOLUTION FOR OUTDOOR COMMUNICATION

Durability
The durability of AsphaltWalk is dependent on the way the product has been applied – especially also on how it has been adjusted to uneven surfaces as well as on the surface in general on where it has been applied. We recommend a maximum use of 1–6 months. Furthermore, it also depends on the mechanical use of the surface where it is applied.

Storage
Shelf life is 12 months from the date of delivery. Storage conditions 15 – 24° C and relative humidity between 40% and 65%.

Warranty
The product has been used in many places under all possible conditions and has proven its reliability and performance. Since there are endless possibilities on how and where the product is going to be applied all product warranty automatically ends as soon as the liner is removed.

Printing method
The material can be colour printed with UV curable inks.

Recycle
AsphaltWalk is designed to be fully recyclable. Used material and production waste can be handled as "aluminum waste".

Technical information		
Size	Width: 1.22 m Length: 30.48 m	
Material	Coated soft aluminum (polyurethane)	220μ +/- 10μ
Adhesive	Permanent acrylic solvent	80μ +/- 5μ
	Total weight	428 g/m²
Certificates	Surfaces roughness (SRT)	55
	Slip-resistance	R11 / BS7976
	Flame resistance	M1 / F2
Application	minimum application temperature	+10°C / +50°F

Peel Adhesion to:	Stainless Steel	Polyethylene	Powder coated surfaces *
15 minute dwell	80oz/in (88N/100 mm)	50oz/in (55N/100mm)	70oz/in (77N/100mm)
24 hours dwell	100oz/in (110N/100 mm)	60oz/in (66N/100 mm)	80oz/in (88N/100 mm)

Chemical resistance			
Water	R	Diesel Fuel	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	I	99% IPA	R
Gasoline unleaded	R		

R = recommended for non continuous immersion
I = recommended for intermittent exposure only
NR = not recommended

info@polichromo.com
www.polichromo.com

SPORT WALK

COMMUNICATION IS NOW POSSIBLE ON ANY SPORTIVE EVENT

SportWalk can be used for short and midterm applications. The material is applicable outdoor on various surfaces. The foil consists of a dimension stable film with a textured resilient surface. The reverse side is coated with a pressure sensitive adhesive covered by a removable liner. The product provides a resilient, durable, slip resistant surface for a large variety of applications.

The foil is characterized by an extremely secure and slip-resistant surface, a chemical resistance and longevity. Moreover, the quick and easy portable product is extremely foot friendly. The waterproof adhesive and the therewith associated durability of the foil guarantee a versatile usability.

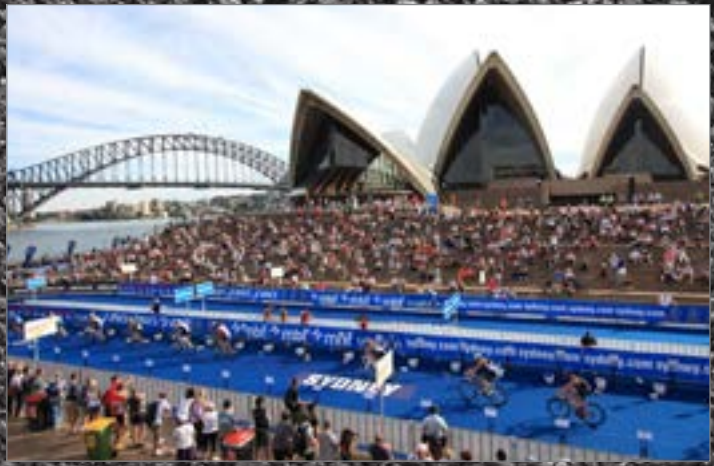

Uses

- Short and midterm outdoor sports events - Marathons
- Road shows

Features & Benefits

- Extremely secure with its slip-resistant surface
- Can be cut to shape
- Robust against abrasion
- Good chemical resistance
- No lamination required

info@polichromo.com
www.polichromo.com

SPORT WALK

COMMUNICATION IS NOW POSSIBLE ON ANY SPORTIVE EVENT

Durability
The durability depends on the way the product has been applied as well as on the condition of the surface and the amount and type of traffic on the area. SportWalk may be used for short and midterm outdoor applications (1 - 2 weeks).
If you are using SportWalk indoor you may see (dependent on the surface) adhesive residues. In such cases we recommend citrus cleaner to remove such residues.

Storage
It is recommended to store the product in a closed packaging at a temperature of +15°C to +30°C and relative humidity between 45% and 60%. The product has a shelf life of 24 months after purchasing the material.

Warranty
Since further circumstances such as application of the foil are not controllable, all product warranty automatically ends as soon as the product has been applied to any surface.

Printing method
The material can be colour printed digital (solvent and UV curable inks). We recommend UVC printing.

Waste handling
It is recommended to handle the used material as industrial waste.

- Liquid varnish may extend life cycle

Technical information			
Size	Width: 1.30 m	Length: 30.48 m	
Material	vinyl foam		450µ +/- 5µ
Adhesive	clear acrylic adhesive		50µ +/- 5µ
Certificates	Slip-resistance		R10
Application	minimum application temperature		+10°C / +50°F

Peel Adhesion to:	Stainless Steel	Polyethylene	Powder coated surfaces *
15 minute dwell	55oz/in (66N/100 mm)	20oz/in (22N/100 mm)	40oz/in (44N/100 mm)

Further data	
Coefficient of Friction (Kinetic) Dry / Wet	Rubber: 0,9 / 1,0 Leather: 0,3 / 1,0
Minimum application temperature	+10°C / +50°F**
Service temperature minimum and maximum	-28°C/-20°F / +104°C/+220°F
Flammability	to be tested

Chemical resistance			
Water	R	Diesel Fuel	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	R	99% IPA	R
Gasoline unleaded	R		

R = recommended for non continuous immersion
I = recommended for intermittent exposure only
NR = not recommended

* Colour and lot variances of coated surfaces including paints, powder coatings, lacquers, stains and other treatments may vary the performance of the tape and should be evaluated for the compatibility of the tape to the specific surface.
**At temperatures below +10 °C the surface has to be pre-treated with a gas burner.

info@asphaltart.com
www.asphaltart.com

CAT WALK

MAKE INDOOR FLOOR AND WET AREA LOOK LIKE A CATWALK

CatWalk can be used for short and midterm applications. The material is applicable indoor on various surfaces. The foil consists of a dimension stable film with a textured resilient surface. The reverse side is coated with a pressure sensitive adhesive covered by a removable liner.

The product is provided with a resilient, durable and chemical resitance as well as a slip resistant surface for a large variety of applications. Moreover, the quick and easy portable product is extremely foot friendly. The waterproof adhesive and the therewith associated durability of the foil guarantee a versatile usability.

Features & Benefits

- Extremely secure with its slip-resistant surface
- Can be cut to shape
- Robust against abrasion
- Good chemical resistance
- Anti bacterial surface
- No lamination required

Uses

- Exhibitions
- Retail
- Leisure centres
- Swimming pools
- Saunas
- Point of purchase
- Supermarkets, shopping malls
- Pharmacies
- Bathrooms

info@polichromo.com
www.polichromo.com

CAT WALK

MAKE INDOOR FLOOR AND WET AREA LOOK LIKE A CATWALK

Durability
The durability depends on the way the product has been applied as well as on the condition of the surface and the amount and type of traffic on the area. We recommend a max 3 months use for indoor or wet area applications. Extended durability is possible when using a liquid Laminate onto the printed area.

Storage
It is recommended to store the product in a closed packaging at a temperature of +15°C to +30°C and relative humidity between 45% and 60%. The product has a shelf life of 24 months after purchasing the material.

Warranty
Since further circumstances such as application of the foil are not controllable, all product warranty automatically ends as soon as the product has been applied to any surface.

Printing method
The material can be colour printed digital (solvent and UV curable inks). We recommend UV curable inks.

Waste handling
CatWalk can be burned after use and it is recommended to handle the production waste and the used material as industrial waste.

- Liquid varnish may extend life cycle
- Same product also available in clear as "ClearWalk" with higher tack

info@polichromo.com
www.polichromo.com

Technical information			
Size	Width: 1.30 m	Length: 30.48 m	
Material	vinyl foam		450μ +/- 5μ
Adhesive	clear acrylic adhesive		50μ +/- 5μ
Certificates	Slip-resistance		R10
Application	minimum application temperature		+10°C / +50°F

Peel Adhesion to:	Stainless Steel	Polyethylene	Powder coated surfaces *
15 minute dwell	55oz/in (66N/100 mm)	20oz/in (22N/100 mm)	40oz/in (44N/100 mm)
24 hours dwell	75oz/in (82N/100 mm)	25oz/in (27N/100 mm)	55oz/in (60N/100 mm)

Chemical resistance			
Water	R	Diesel Fuel	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	R	99% IPA	R
Gasoline unleaded	R		

R = recommended for non continuous immersion
I = recommended for intermittent exposure only
NR = not recommended

Further data	
Coefficient of Friction (Kinetic) Dry / Wet	Rubber: 0,9 / 1,0 Leather: 0,3 / 1,0
Minimum application temperature	+10°C / +50°F**
Flammability	not tested

* Colour and lot variances of coated surfaces including paints, powder coatings, lacquers, stains and other treatments may vary the performance of the tape and should be evaluated for the compatibility of the tape to the specific surface.
**At temperatures below +10 °C the surface has to be pre-treated with a gas burner.

TEX WALK

THE SOLUTION FOR INDOOR & OUTDOOR COMMUNICATION

TexWalk is a fabric with a textured matte vinyl coating.
It is designed to be used for short to midterm applications, dependent on where the product is applied.
TexWalk works great on carpet, tile, concrete, wooden and PVC floors, untreated stone and almost every surface indoor and outdoor. The product can be used outdoor for up to 1 week but is not designed for road traffic.

Uses

- Applied on top of carpeting, tiles, wooden and PVC floors and untreated stone
- Wall graphics
- Door coverage
- Tradeshows (exhibition walls and floors)
- POP / POS

Features & Benefits

- Structured matte finish
- No or almost no adhesive residue
- Sticks on almost any surface
- Easy to apply and remove
- Slip resistant - R12 certificate
- Print and go - no laminate solution
- Digital cutting into any shape

info@polichromo.com
www.polichromo.com

TEX WALK

THE SOLUTION FOR INDOOR COMMUNICATION

Durability
The durability of TexWalk is dependent on the way the product has been applied. We recommend a maximum use of 1 month for indoor floor application and 3-24 months for walls and non pedestrian application and a maximum use of 1 week for outdoor applications. Furthermore, it also depends on the mechanical use of the surface where it is applied.

Storage
Shelf life is 12 months from the date of delivery. Storage conditions 15 – 24° C and relative humidity between 40% and 65%.

Warranty
The product has been used in many places under all possible conditions and has proven its reliability and performance. Since there are endless possibilities on how and where the product is going to be applied all product warranty automatically ends as soon as the liner is removed.

Printing method
The material can be colour printed digital (solvent and UV curable inks).

Recycle
We recommend to handle the production waste and the used material as industrial waste.

Technical information		
Size	Width: 1.22 m Length: 25.00 m	
Material	Fabric with a textured matte vinyl coating (white)	0.10 - 0.25 mm
Adhesive	Acrylic solvent	80μ +/- 5μ
Certificates	Slip-resistance	R12 / BS7976
	Flame resistance	M1 / F3
Application	Minimum application temperature	+10°C / +50°F

info@polichromo.com
www.polichromo.com

STAR WALK

THE SOLUTION FOR MARBLE

StarWalk is a laminated PET vinyl film with a silver metallized back that is designed for an easy application, repositionable and removable without any residues. The film is especially designed for marble, polished and smooth stone. The especially for this kind of application designed adhesive has a felt low tack that is developing its full adhesive strength after 24 to 48 hours.

Due to the good repositioning ability and the low tack feeling at the beginning the application is even for inexperienced users very easy.

Advice

- The adhesive back needs to be applied on the origin liner or on another siliconized liner if you would like to reuse it with temporary storage.
- The silver back can be cleaned with cold water if it's polluted.
- Not recommended or only after previous testing for applications on the following surfaces: vinyl, aluminum, copper.
- It is recommended to round the corners.

Applications

- Marble
- Polished stone
- Smooth stone

Advantages

- Easy application and removal
- Removal without adhesive residue
- Excellent durability
- Great heat resistance and dimensional stability
- Cleanable back

info@polichromo.com
www.polichromo.com

STAR WALK

THE SOLUTION FOR MARBLE

Durability
Up to 1 year for indoor applications.

Shelf life
1 year from date of delivery, stored at +15°C to +24°C and relative humidity between 40% and 65%.

Warranty
The product has already been tested on many places and under different circumstances and proved its quality and performance. Since there are endless possibilities on how and where the product is going to be applied, all product warranty automatically ends as soon as the liner is removed.

Printing method
The product can be printed with solvent, eco-solvent, UV curable inks and latex inks.

Disposal
It is recommended to handle the used material and production waste as industrial waste.

Technical Information StarWalk		
Size	Width: 1.37 m Length: 30.48 m	
Material	Vinyl film - Self-adhesive - Printable white front - Silver back - Siliconized paper liner	170μ +/- 5μ 63g/m2
Adhesive	Repositionable special adhesive	30g/m2

Technical Information StarWalk laminat		
Size	Width: 1.37 m Length: 30.48 m	
Material	self-adhesive structured laminat	170μ +/- 5μ
Adhesive	permanent, clear adhesive	30g/m2
Certificate	Slip resistance	R11

info@polichromo.com
www.polichromo.com

ATHLETIC WALK

THE SOLUTION FOR SPORTS HALL FLOORS

AthleticWalk is a laminated PET vinyl film with a silver metallized back that is designed for an easy application, repositionable and removable without any residues. The film is especially designed for indoor sports hall floors with a very smooth surface. The especially for this kind of application designed adhesive has a felt low tack that is developing its full adhesive strength after 24 to 48 hours.

Due to the good repositioning ability and the low tack feeling at the beginning the application is even for inexperienced users very easy.

Advice

- The adhesive back needs to be applied on the origin liner or on another siliconized liner if you would like to reuse it with temporary storage.
- The silver back can be cleaned with cold water if it's polluted.
- It is recommended to round the corners.

Applications

- Indoor sports floors
- Sports hall floors

Advantages

- Easy application and removal
- Removal without adhesive residue
- Excellent durability
- Great heat resistance and dimensional stability
- Cleanable back

info@polichromo.com
www.polichromo.com

ATHLETIC WALK

THE SOLUTION FOR SPORTS HALL FLOORS

Durability
Up to 1 year for indoor applications.

Shelf life
1 year from date of delivery, stored at +15°C to +24°C and relative humidity between 40% and 65%.

Warranty
The product has already been tested on many places and under different circumstances and proved its quality and performance. Since there are endless possibilities on how and where the product is going to be applied, all product warranty automatically ends as soon as the liner is removed.

Printing method
The product can be printed with solvent, eco-solvent, UV curable inks and latex inks.

Disposal
It is recommended to handle the used material and production waste as industrial waste.

Technical Information AthleticWalk		
Size	Width: 1.37 m Length: 30.48 m	
Material	Vinyl film - Self-adhesive - Printable white front - Silver back - Siliconized paper liner	100μ +/- 5μ 63g/m2
Adhesive	Repositionable special adhesive	30g/m2

Technical Information AthleticWalk laminat		
Size	Width: 1.37 m Length: 30.48 m	
Material	Self-adhesive structured laminat	100μ +/- 5μ
Adhesive	Permanent, clear adhesive	30g/m2
Certificat	Slip resistance	R10

info@polichromo.com
www.polichromo.com

SOFT WALK

COMMUNICATE ON INDOOR AND OUTDOOR FLOORS IN A BLINK

SoftWalk can be applied as a carpet and is reusable. It can be used indoors as well as outdoors. The material is made of a vinyl soft foam. Antibacterial coating prevents the growth of unwanted bacteria and ensures hygiene for applications on humid floor. Thanks to the special profile the material can be cleaned easily and the free water drain on the reverse side is given. The SoftWalk adapts simply to many surfaces and can smoothly be installed. SoftWalk is suitable as a reusable advertising product for fairs or events and can be used for daily changing applications.

It attracts attention, gives you a "Soft Walk" feeling, ensures greater safety and simply looks good. When you apply outdoor you may use double sided tapes when windy conditions to keep it on the ground. The product is able to float on water. The lifetime can be extended by covering the surface with liquid laminate. The product can be printed on both sides.

Uses

- Sports stadiums
- Road shows
- Museums and public galleries
- POS adverstising carpet
- Exhibitions
- Shop entrance
- Retail environments
- Swimming pool

Features & Benefits

- Easy to apply, rolls out like a carpet
- Easy to remove
- Reusable
- Antibacterial coating
- Liquid varbish may extend life cycle

info@polichromo.com
www.polichromo.com

SOFT WALK

COMMUNICATE ON INDOOR AND OUTDOOR FLOORS IN A BLINK

Durability
The short term life depends on the proper use as well as on the mechanical influences.

Storage
The product has a shelf life of 12 months after purchasing the material. It is recommended to store the product at a temperature of +15°C to +24°C and relative humidity between 45% and 60%.

Warranty
The product has been used in many places under all possible conditions and has proven its reliability and performance. Since there are endless possibilities on how and where the product is going to be applied, all product warranty automatically ends as soon as the liner is removed.

Printing method
The material can be printed coloured with UV curable inks.
The material comes with liner.

Waste handling
Used material and production waste can be handled as "Plastic" waste.

- Liquid varnish may extend life cycle

Technical information		
Size	Width: 1.524 m Length: 5 m / 25 m	
Material	vinyl soft foam (polyethylene)	480μ +/- 5μ
Total weight	950 g/m^2 ± 5%	
	very good slip-resistance	

info@polichromo.com
www.polichromo.com